


SAFETY & WARNINGS

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Do not puncture, cut, or shorten, fixture. Doing so causes risk of electric shock and will void the UL Safety Certification.
2. Do not use if there is any damage to the fixture or AC cord insulation. Inspect periodically.
3. All plastics are affected by the elements and may shift in color and other properties after product installation, particularly with direct exposure to sun, chlorinated water, and other chemicals.
4. Do not submerge fixture in liquids or use the product in the vicinity of standing water or other liquids.
5. Secure fixture using only hangers or mounting clips provided. Do not secure with staples, nails, its input wire, or like means that may damage the insulation or permanently attach the fixture to a building structure.
6. Do not subject fixture to continuous flexing.
7. Do not install near areas with exposure to salt water or chlorinated water.
8. Do not install in direct sunlight or damage to the LED phosphor will occur.
9. Do not attempt to fix this product in the field.



QUICK SPECS / MODELS

Input	120VAC, 60Hz
Power	See Specification Sheet
Max Run	300W
Environment	Indoor / Dry Location

WARNING!

THIS IS NOT A CUSTOMIZABLE FIXTURE.
DO NOT MODIFY.

CCT SELECT

3000K

3500K


4000K

INSTALLATION

1 TURN POWER OFF AT CIRCUIT BREAKER




SHOCK HAZARD! May result in serious injury or death.
Turn power OFF at circuit breaker prior to installation.

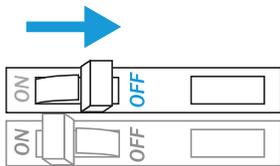

2 MOUNT FIXTURE

2.1 SCREW MOUNTING CLIPS TO SURFACE


Measure and mark surface, then fasten screws to surface with 1/8 in. of space between surface and screw head.

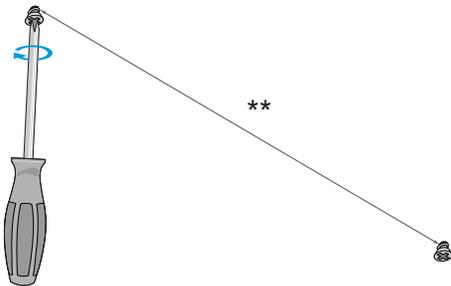

** Distance between screw placement varies with fixture length.


2.2 PLACE FIXTURE OVER SCREWS

Align Fixture with screws. Insert screws into mounting holes.

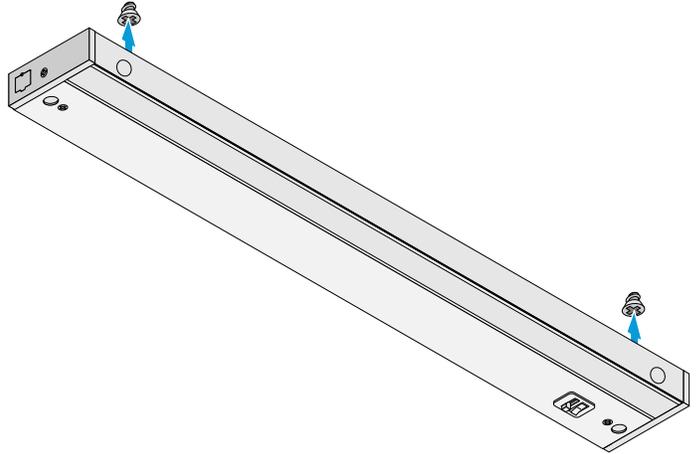

2.3 SET FIXTURE



Slide fixture, setting screws into mounting holes.

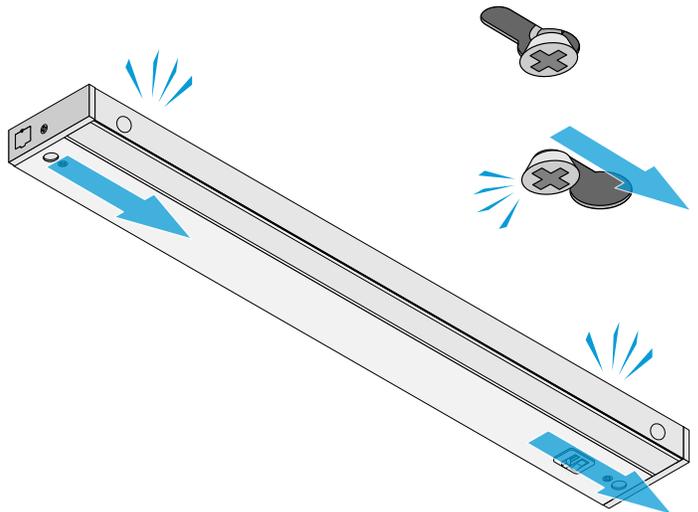

INSTALLATION (CONT.)


3 CONNECT FIXTURES TOGETHER

LINKABLE END-TO-END CONNECTOR

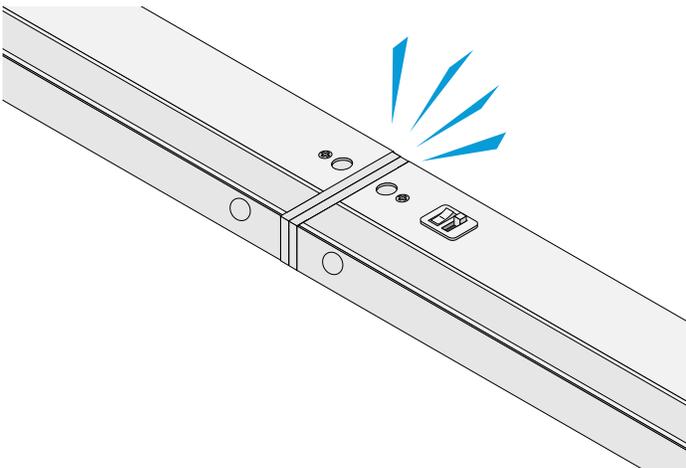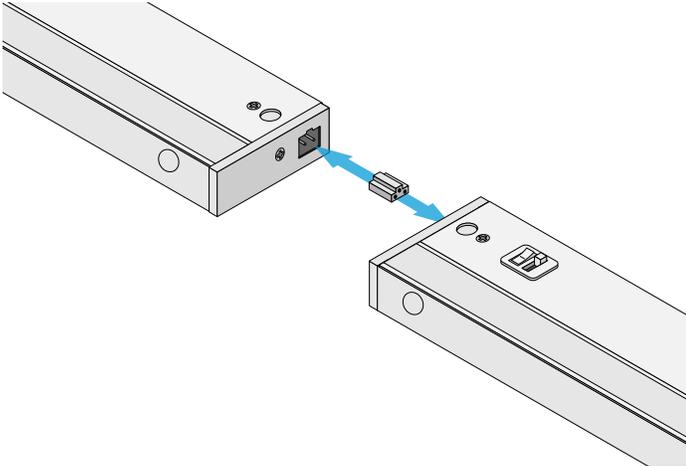



4 a CONNECT TO POWER (PLUG-IN CONNECTOR)

Connect power cable with AC plug into 120VAC receptacle.

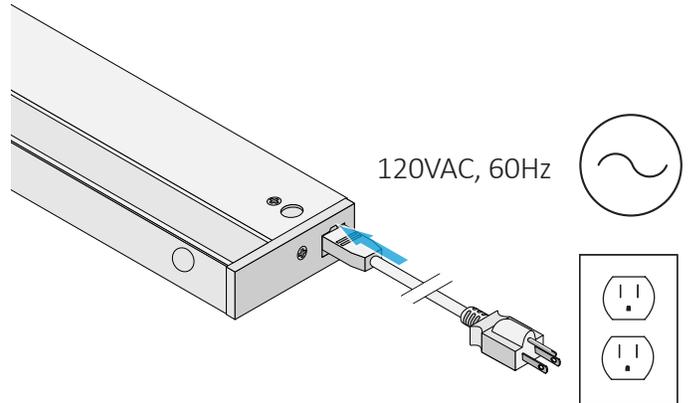


4 b CONNECT TO POWER (HARD WIRE CONNECTOR)

Insert connection wires into junction box, then using twist-on wire connection, connect wiring within DI-FENSEL-JBOX-WH - FENCER SABER/FOIL SELECT Junction Box.

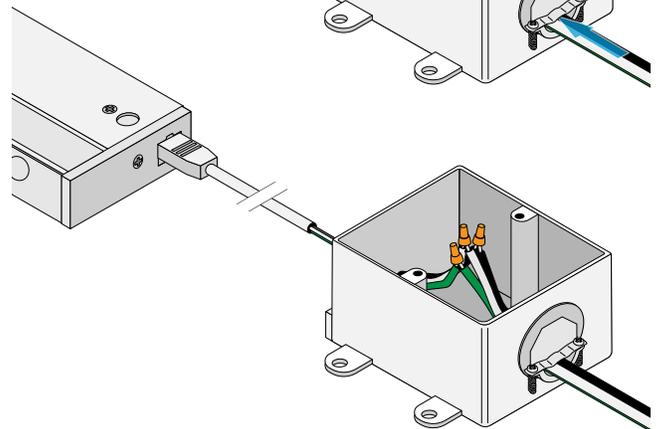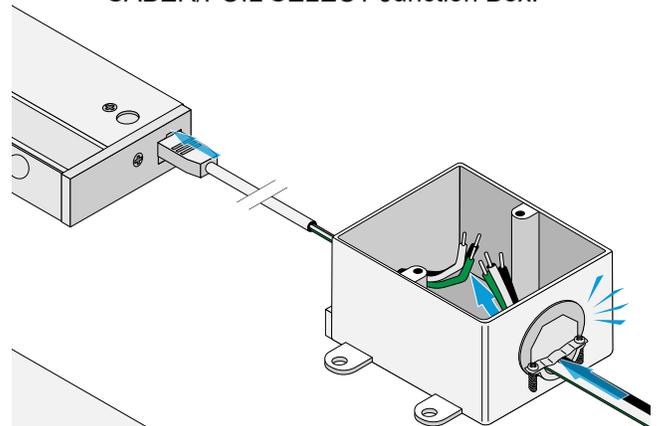


INSTALLATION (CONT.)

Using Phillips head screwdriver, fasten top to junction box.

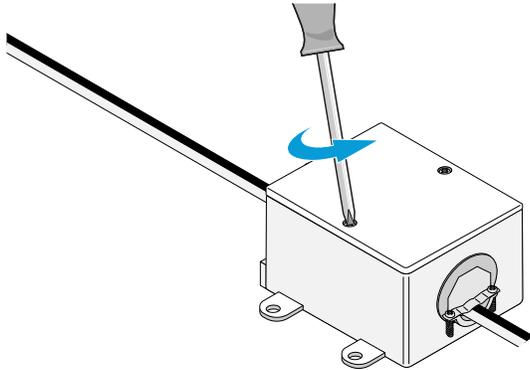


Connect wiring by inserting corresponding wires into terminal blocks


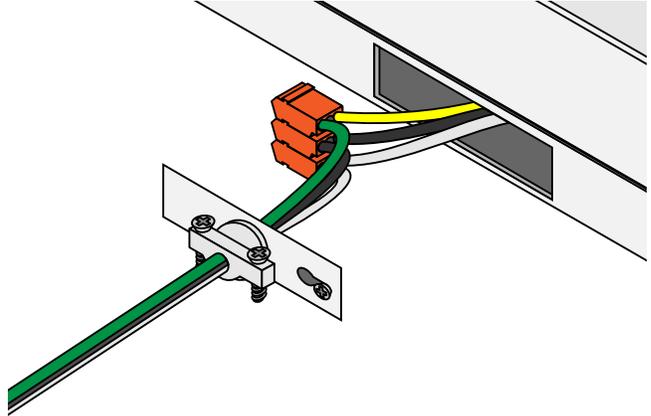


4 C CONNECT TO POWER (DIRECT HARD WIRE)


Open back panel of fixture using phillipshead screwdriver.

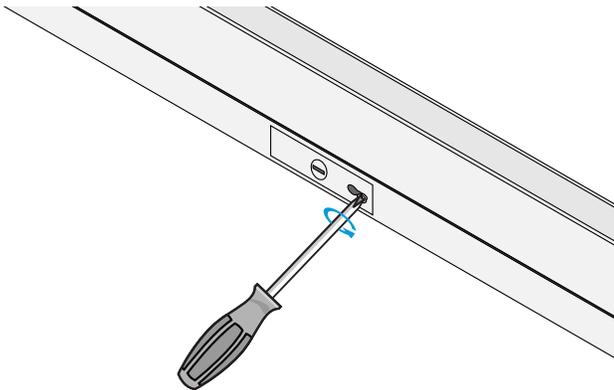

Remove knockout from back panel using hammer and flathead screwdriver.

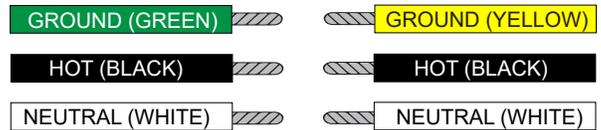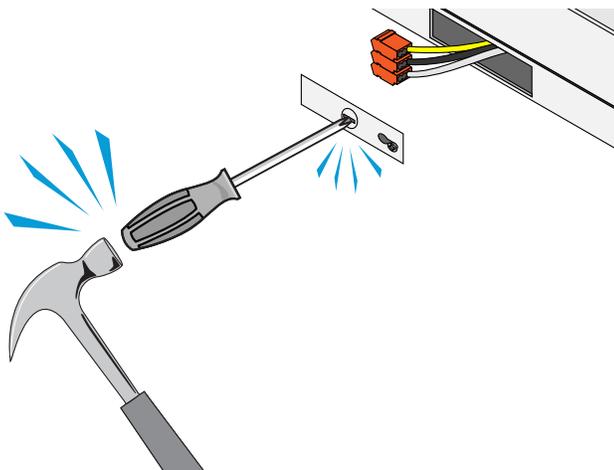


Close back panel using phillipshead screwdriver.

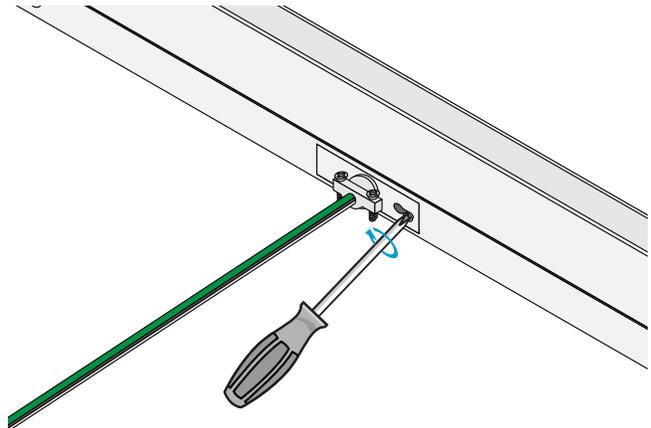


INSTALLATION (CONT.)

4 d CONNECT TO POWER (MASTER ON/OFF SWITCH & JUNCTION BOX)

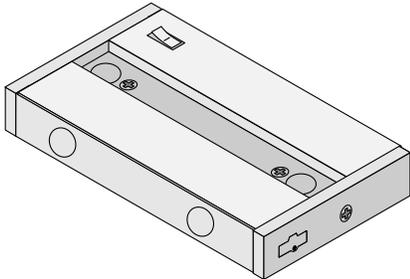

Remove cover part of FENCER Master On/Off Switch & Junction Box (DI-1305-WH) to access wiring compartment. Included push-in wire connectors should only be used with 12AWG wire. If using thinner gauge wire cut off pre-attached connectors and make connection with standard UL Listed twisted wire connectors.

FENCER FOIL Extension Cable

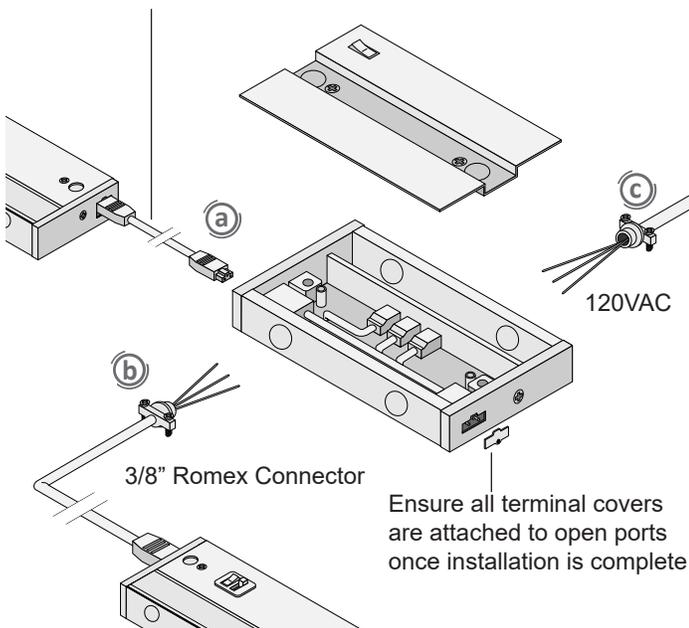


a. Use FENCER FOIL Extension Cable (DI-1307-WH, DI-1308-WH, or DI-1309-WH) to connect to FENCER Master On/Off Switch & Junction Box (DI-1305-WH) or link between FENCER FOIL fixtures.

b. Use FENCER SABER 72 in. Power Cable with Hard-Wire Connection (DI-1312-WH) to connect to FENCER Master On/Off Switch & Junction Box (DI-1305-WH). Hard-wired connections must be made in the FENCER J-box or other Listed enclosure.

c. Romex (NM) or BX Cable

5 TURN POWER ON AT CIRCUIT BREAKER

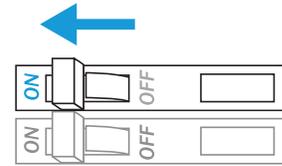

TROUBLESHOOTING

Lights are flickering	<ul style="list-style-type: none"> Verify strip is connected to a 120VAC, 60Hz circuit.
Lights will not illuminate	<ul style="list-style-type: none"> Ensure main power is turned On. Check wiring to ensure proper polarity.

TOOLS & RESOURCES

FENCER SABER SELECT SPECIFICATION SHEET

For full specifications.



Toll Free: 877.817.6028 | Fax: 415.592.1596 | www.DiodeLED.com | info@DiodeLED.com
 © 2020 Elemental LED, Inc. All rights reserved. Specifications are subject to change without notice.