


SAFETY & WARNINGS

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Do not puncture, cut, or shorten, fixture. Doing so causes risk of electric shock and will void the UL Safety Certification.
2. Do not use if there is any damage to the fixture or AC cord insulation. Inspect periodically.
3. All plastics are affected by the elements and may shift in color and other properties after product installation, particularly with direct exposure to sun, chlorinated water, and other chemicals.
4. Do not submerge fixture in liquids or use the product in the vicinity of standing water or other liquids.
5. Secure fixture using only hangers or mounting clips provided. Do not secure with staples, nails, its input wire, or like means that may damage the insulation or permanently attach the fixture to a building structure.
6. Do not subject fixture to continuous flexing.
7. Do not install near areas with exposure to salt water or chlorinated water.
8. Do not install in direct sunlight or damage to the LED phosphor will occur.
9. Do not attempt to fix this product in the field.



QUICK SPECS / MODELS

Input	120VAC, 60Hz
Power	See Specification Sheet
Max Run	300W
Environment	Indoor / Dry Location



WARNING!



THIS IS NOT A CUSTOMIZABLE FIXTURE.
DO NOT MODIFY.

FENCER® FOIL™ SELECT COVE


INSTALLATION GUIDE

INSTALLATION

① TURN POWER OFF AT CIRCUIT BREAKER



SHOCK HAZARD! May result in serious injury or death.
Turn power OFF at circuit breaker prior to installation.




② MOUNT FIXTURE

Note: It is recommended to use at least 2 mounting clips per fixture regardless of length.


2.1 SCREW MOUNTING CLIPS TO SURFACE

Measure and mark surface, then mount rotating mounting clips to desired position using Phillips head screwdriver.

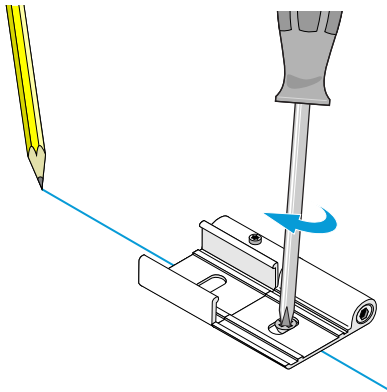


2.2 LOOSEN MOUNTING CLIP (OPTIONAL*)

Using Allen wrench and T-6 hex key, loosen screws within mounting clip.

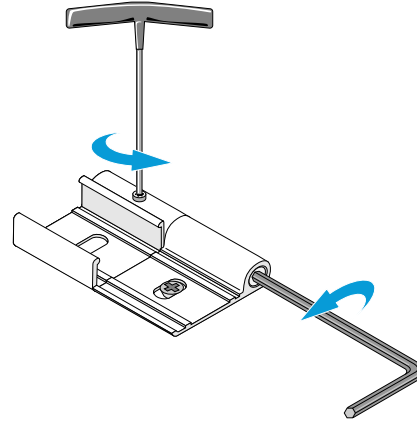


2.3 INSERT FENCER FIXTURE

Insert back edge of FENCER fixture into mounting clip.

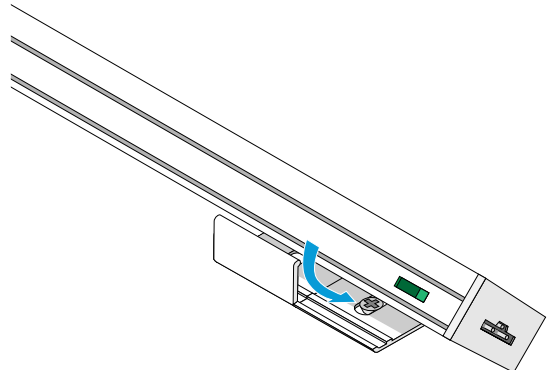

2.4 INSERT FENCER FIXTURE (cont.)


Push down front edge of FENCER Fixture until secured into mounting clip.

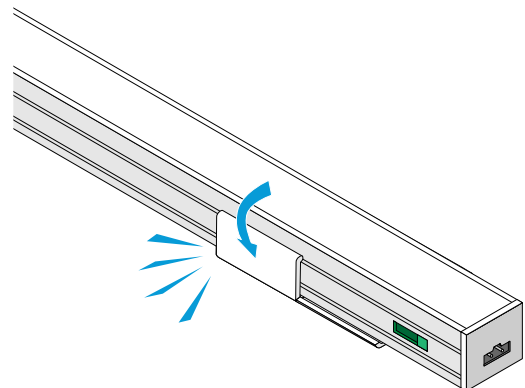

INSTALLATION (CONT.)


2.5 ADJUST MOUNTING CLIP (OPTIONAL)

Angle mounting clip into desired position.

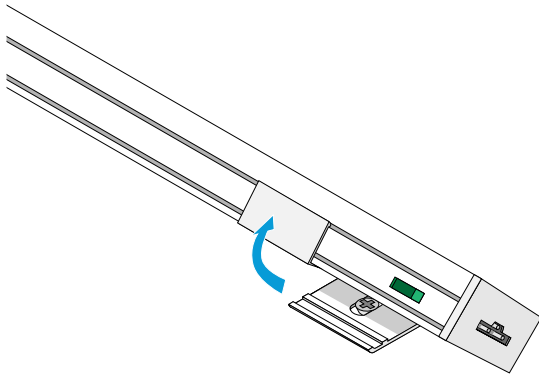


2.6 FASTEN MOUNTING CLIP

Tighten mounting clip screws using Allen wrench and T-6 hex key.

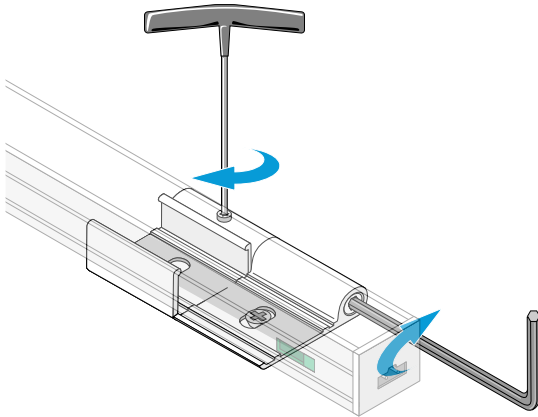


3 CONNECTING FIXTURES TOGETHER

LINKABLE END-TO-END CONNECTOR

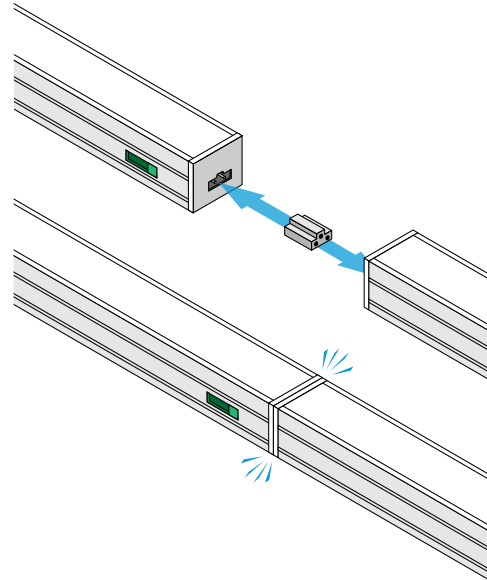

4 a CONNECT TO POWER (PLUG-IN)

Connect power cable with AC plug into 120VAC receptacle.

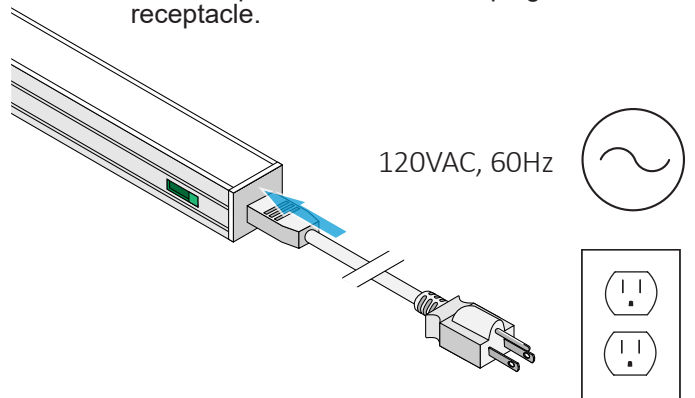

FENCER® FOIL™ SELECT COVE


INSTALLATION GUIDE

INSTALLATION (CONT.)


④ ⑥ CONNECT TO POWER (HARD WIRE)

Insert connection wires into junction box, then using twist-on wire connection, connect wiring within DI-FENSEL-JBOX-WH - FENCER SABER/FOIL SELECT Junction Box.


GROUND (GREEN)	GROUND (GREEN)
HOT (BLACK)	HOT (BLACK)
NEUTRAL (WHITE)	NEUTRAL (WHITE)

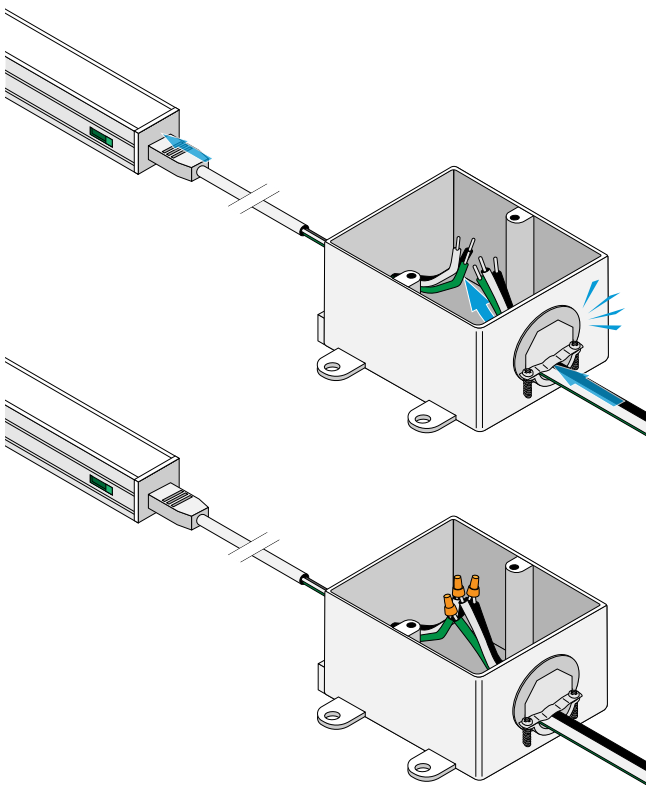


Using Phillips head screwdriver, fasten top to junction box.

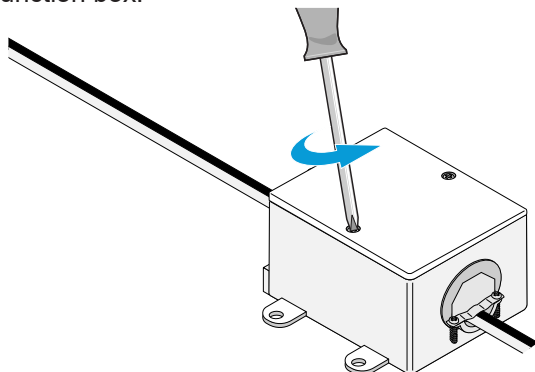

④ ⑦ CONNECT TO POWER (MASTER ON/OFF SWITCH & JUNCTION BOX)

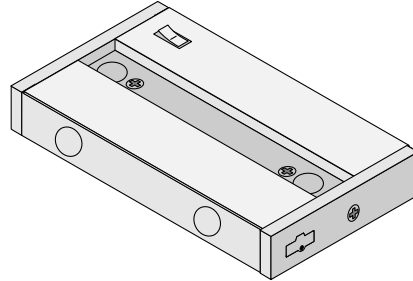

Remove cover port of FENCER FOIL Master On/Off Switch & J-Box DI-1305-WH - FENCER SABER/FOIL Master On/Off Switch & Junction Box to access wiring compartment. Included push-in wire connectors should only be used with 12AWG wire. If using thinner gauge wire cut off pre-attached connectors and make connection with standard UL Listed twisted wire connectors.

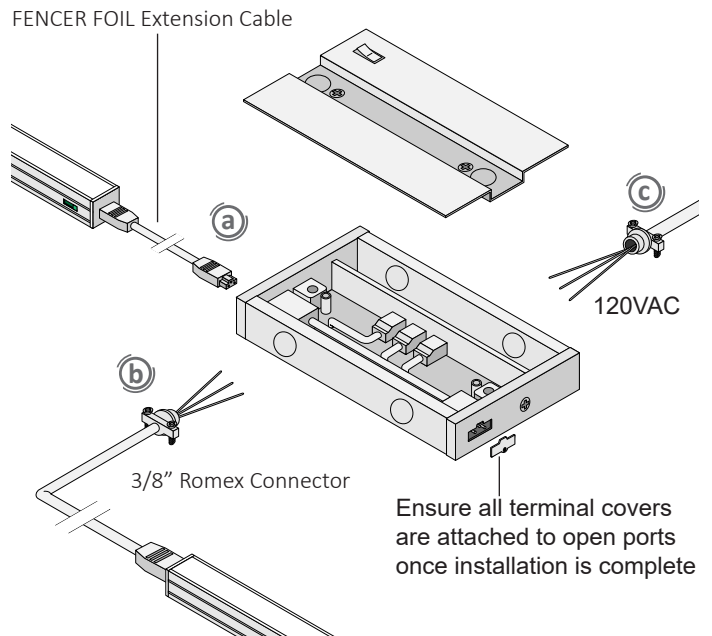

a. Use FENCER FOIL Extension Cable (DI-1308-WH, DI-1309-WH, DI-1310-WH) to connect to FENCER FOIL Direct Wire Switch & J-Box (DI-1305-WH) or link between FENCER FOIL fixtures.

b. Use FENCER FOIL 72 in. Power Cable with Hard-Wire Connection (DI-1312-WH) to connect to FENCER FOIL Direct Wire Switch & J-Box (DI-1305-WH). Hard-wired connections must be made in the FENCER J-box or other Listed enclosure.


c. Romex (NM) or BX Cable

FENCER® FOIL™ SELECT COVE

INSTALLATION GUIDE


INSTALLATION (CONT.)

5 TURN POWER ON AT CIRCUIT BREAKER



OPERATION

Using switch on side of fixture, select desired color temperature.

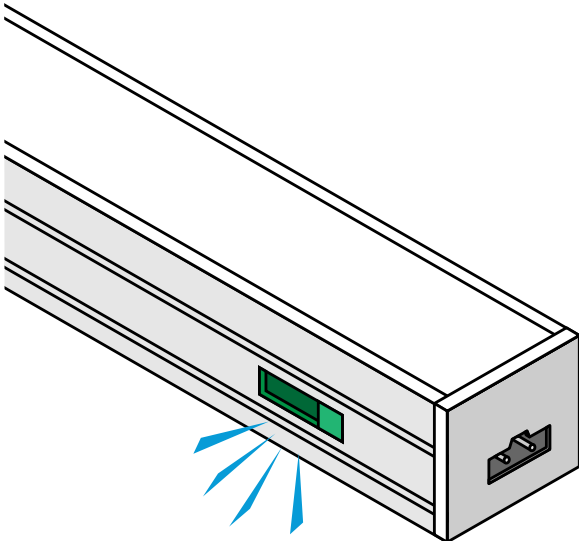

Left - 3000K



Center - 3500K



Right - 4000K

TROUBLESHOOTING

Lights are flickering

- Verify strip is connected to a 120VAC, 60Hz circuit.

Lights will not illuminate

- Ensure main power is turned On.
- Check wiring to ensure proper polarity.

TOOLS & RESOURCES

FENCER FOIL SELECT COVE SPECIFICATION SHEET

For full specifications.



Toll Free: 877.817.6028 | Fax: 415.592.1596 | www.DiodeLED.com | info@DiodeLED.com
© 2020 Elemental LED, Inc. All rights reserved. Specifications are subject to change without notice.