

QUICK SPECS / MODELS

SKU	DI-TB-CONN-TT*
Max. Voltage	24V
Max. Amp	12V - 5A / 24V - 4A
Wire Gauge	16 AWG - 20 AWG
Ambient Temp †	-4° - 122°F (-20° - 50°C)

† Do not install product in environment outside listed temperature.

SAFETY & WARNINGS


1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Do not modify or disassemble this product beyond instructions or the warranty will be void.
4. Do not submerge, or install within 5 feet of a swimming pool.
5. Failure to follow safety warnings, and installation instructions will void the warranty for this product.



INSTALLATION (WIRE)


1 INSERT WIRE

Insert 16-20 AWG wire into terminals, observing polarity.



2 SECURE CONNECTION

Using phillips head screwdriver, fasten terminal screws to secure wire in place.

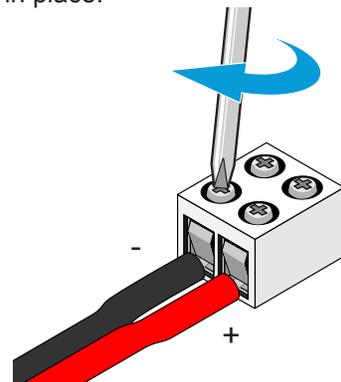

TAPE LIGHT TERMINAL BLOCK CONNECTOR

INSTALLATION GUIDE


INSTALLATION (STRIP)

Refer to chart below for number of solder pads recommended to leave on end of Tape Light when connecting to Screw Clip Connector.

	BLAZE™ BASICS 100	BLAZE™ BASICS 200	BLAZE™ X 100	BLAZE™ X 200	BLAZE™ X 300
2 Solder pads	✓		✓		
4 Solder pads		✓		✓	✓


INSTALLATION (2 SOLDER PAD)

1 CUT TAPE LIGHT (2 SOLDER PAD)

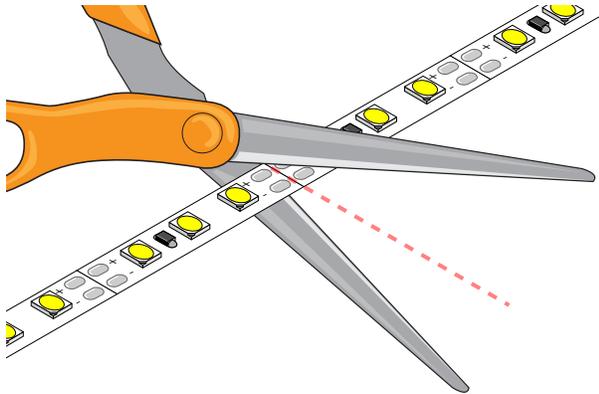

2 INSERT TAPE LIGHT


Insert Tape Light into terminal, observing polarity.

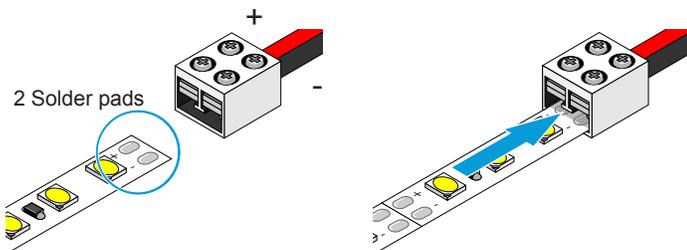

INSTALLATION (4 SOLDER PAD)


1 CUT TAPE LIGHT (4 SOLDER PAD)

Cut Tape Light just before two extra required solder pads.

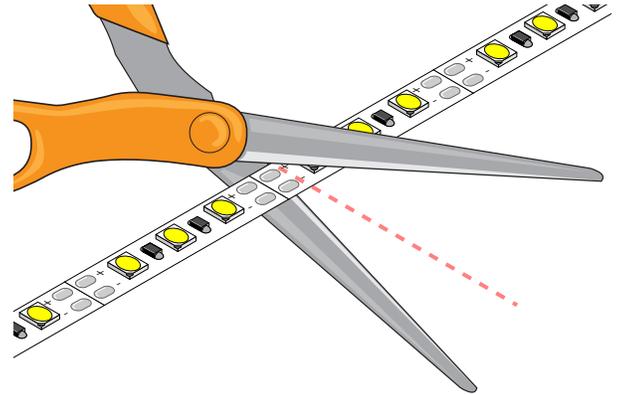


2 INSERT TAPE LIGHT

Insert Tape Light into terminal, observing polarity.

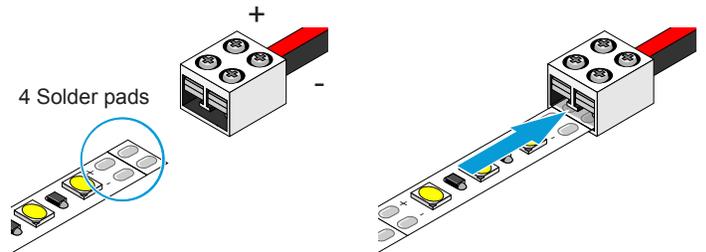

3 SECURE CONNECTION

Using phillips head screwdriver, fasten terminal screws to secure Tape Light in place.



Toll Free: 877.817.6028 | Fax: 415.592.1596 | www.DiodeLED.com | info@DiodeLED.com
 © 2018 Elemental LED Inc. All rights reserved. Specifications are subject to change without notice.